

Surface Mounted LED Down Light

Description:

DLO series with a fashionable design, this series of LED surface mounted ceiling light is a commendable choice for commercial and residential places, like home, shop, hotel, restaurant and so on. Firstly, it adopts aluminum profile providing excellent thermal dissipation. Secondly, the driver can be put into the light body, which is more convenient for customers to save spaces and install them. Thirdly, it can also be a suspension light with a hanging fixture..

Application:

- Shopping mall, jewelry shop and fashion store lighting.
- Art gallery, furniture, museum and showroom lighting .
- Gym, hotel, hospital and stage lighting.
- Food Lighting (Meat Fruit Vegetable Bread etc.)



Information:

Features:

- Lighting Source: OSRAM Bridgelux
- Available in 90+.
- Dimming methods: ON/ OFF Triac Dimmable 0-10V DALI
- No need Cutout , surface mount install or hanging install.
- Strongly light up an object from far or high distance.
- Unique and compact design with perfect thermal management.
- High quality LED, No UV or IR radiation

Specification:



- Power factor: >0.90.
- Color Temp.(Color) : 2700K 3000K 3500K 4000K 5000K
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS
- Driver Certificates : TUV CB UL ETL CE ROHS SAA



Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)
OP-DLO9W O1	AC220-240V AC100-277V	9W	OSRAM Bridgelux	900LM	45	2700K 3000K 4000K 5000K	90+	Φ90 H90
OP-DLO15W O1	AC220-240V AC100-277V	15W	OSRAM Bridgelux	1500LM	45	2700K 3000K 4000K 5000K	90+	Φ110 H120
OP-DLO20W O1	AC220-240V AC100-277V	20W	OSRAM Bridgelux	2000LM	45	2700K 3000K 4000K 5000K	90+	Φ130 H152
OP-DLO25W O1	AC220-240V AC100-277V	25W	OSRAM Bridgelux	2500LM	45	2700K 3000K 4000K 5000K	90+	Φ130 H152
OP-DLO30W O1	AC220-240V AC100-277V	30W	OSRAM Bridgelux	3000LM	45	2700K 3000K 4000K 5000K	90+	Φ170 H185
OP-DLO35W O1	AC220-240V AC100-277V	35W	OSRAM Bridgelux	3500LM	45	2700K 3000K 4000K 5000K	90+	Φ170 H185
OP-DLO40W O1	AC220-240V AC100-277V	40W	OSRAM Bridgelux	4000LM	45	2700K 3000K 4000K 5000K	90+	Φ193 H190
OP-DLO45W O1	AC220-240V AC100-277V	45W	OSRAM Bridgelux	4500LM	45	2700K 3000K 4000K 5000K	90+	Φ193 H190

Photo-metric :

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

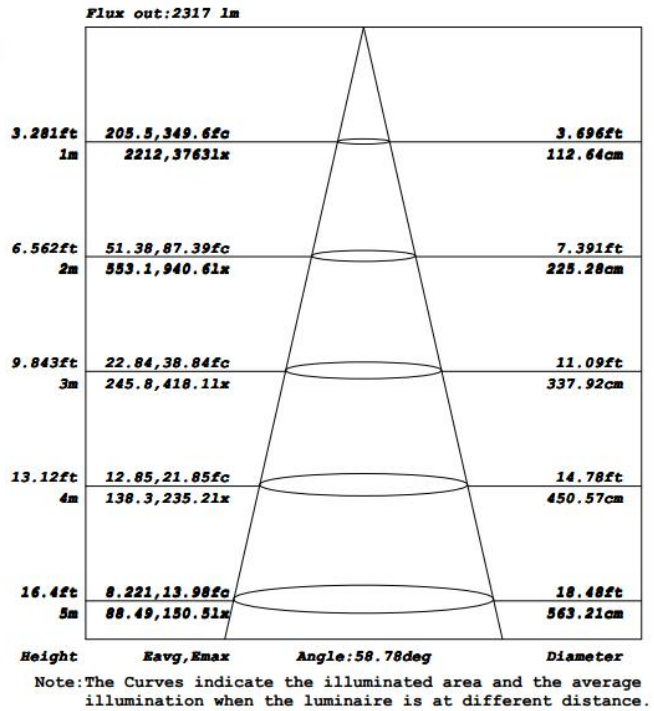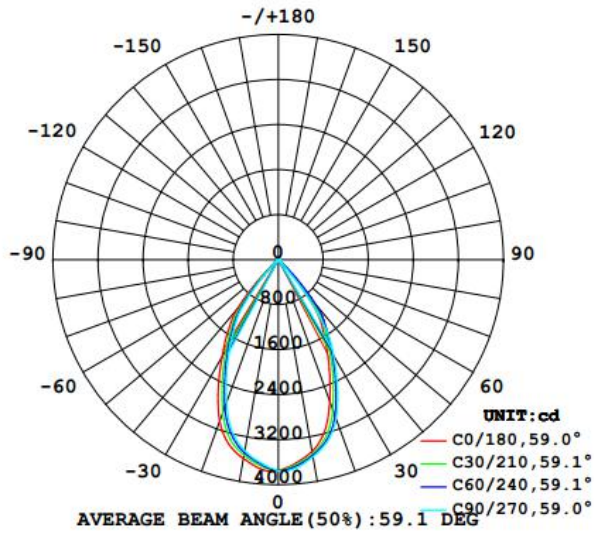

* Please contact our sales for IES file

Pictures :

