

## Square Gimbal Down Light

### Description:

DLT series is recessed gimbal light being 360° rota-table in the horizontal plane and 60° adjustable in the vertical plane ,it can place light exactly where it is needed, minimizing any glare to customers,Giving you the option to control the direction of the light. This is great for sloped ceilings or when you need the flexibility to change spotlighting. it is ideal for shop and retail applications, where either accent lighting, or simply high flux lighting is required.

A compact design with superior thermal management makes this fixture perfect for any truly High-End commercial application..



### Application:

- Shopping mall,Retail shop and fashion store lighting.
- Art gallery,furniture,museum and showroom lighting .
- Gym, , household,Restaurant.
- Food Lighting ( Meat Fruit Vegetable Bread etc.)



## Information:

### Features:

- SDCM=3
- Extremely long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- 360° rotation on horizontal and 90° adjustment on vertical
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 °C

### Specification:



- Power supply : LIFUD/ PHILIPS
- Lighting Source: OSRAM / BRIDGELUX
- Power factor: >0.93.
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS



Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout(mm)
OP-DLT15W SQ1	AC220-240V AC100-277V	1*15W	OSRAM Bridgelux	1500LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D115 H115mm	L100*W100
OP-DLT15W SQ2	AC220-240V AC100-277V	2*15W	OSRAM Bridgelux	3000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D230 H115mm	L215*W100
OP-DLT15W SQ3	AC220-240V AC100-277V	3*15W	OSRAM Bridgelux	4500LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D350 H115mm	L335*W100
OP-DLT20W SQ1	AC220-240V AC100-277V	1*20W	OSRAM Bridgelux	2000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D138 H138mm	L125*W125
OP-DLT20W SQ2	AC220-240V AC100-277V	2*20W	OSRAM Bridgelux	4000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D278 H138mm	L265*W125
OP-DLT20W SQ3	AC220-240V AC100-277V	3*30W	OSRAM Bridgelux	6000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D417 H138mm	L400*W125
OP-DLT30W SQ1	AC220-240V AC100-277V	1*30W	OSRAM Bridgelux	3000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D163 H163mm	L150*W150
OP-DLT30W SQ2	AC220-240V AC100-277V	2*30W	OSRAM Bridgelux	6000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D330 H163mm	L310*W150
OP-DLT30W SQ3	AC220-240V AC100-277V	3*30W	OSRAM Bridgelux	9000LM	10/24 38/60	2700K 3000K 4000K 5000K	90+	D495 H163mm	L480*W150

## Photo-metric :

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

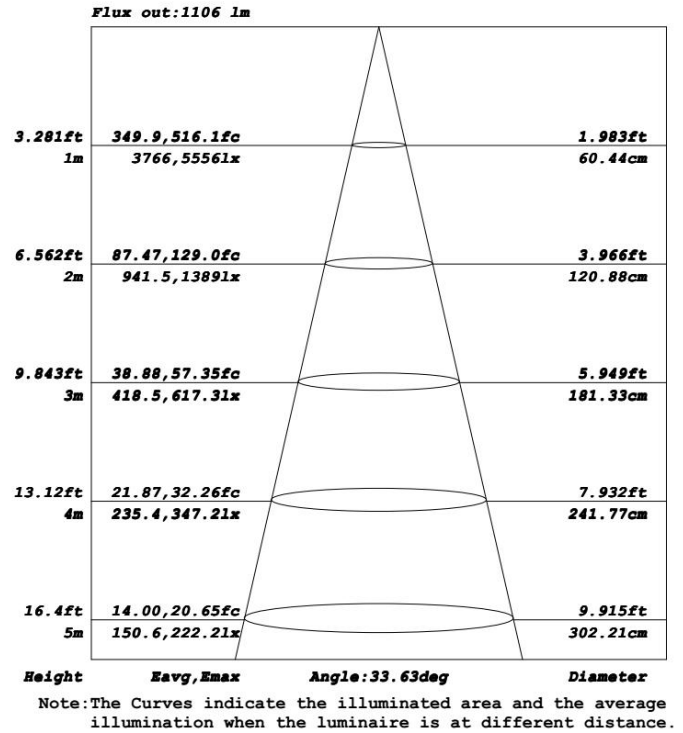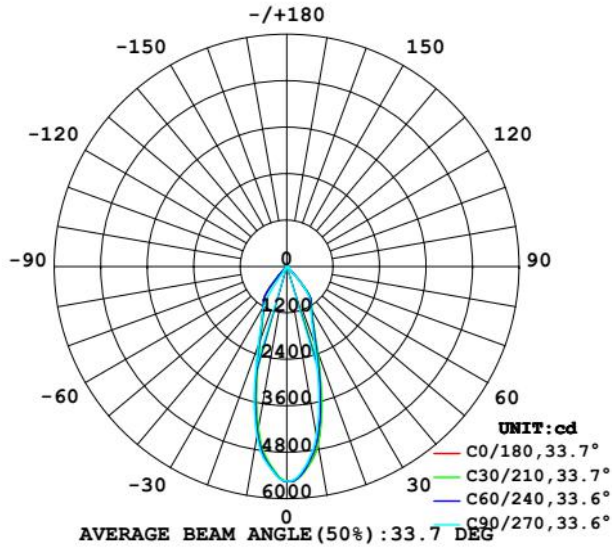

\* Please contact our sales for IES file

## Pictures :

