

Surface Mounted LED Down Light Adjustable

Description:


DLO series with fold-able design, this series of LED surface mounted ceiling light is a commendable choice for commercial and residential places, like home, shop, hotel, restaurant and so on. Firstly, it adopts aluminum profile providing excellent thermal dissipation. Secondly, the driver can be put into the light body, which is more convenient for customers to save spaces and install them. Thirdly, it is adjustable to give you the option to control the direction of the light.

It is Ideal for for your planned retrofit or new constructing, Creating tremendous energy saving at a extremely affordable price



Application:

- Villa ,Lobbies, Corridors
- Hotel Lighting Restaurant
- Residential Lighting

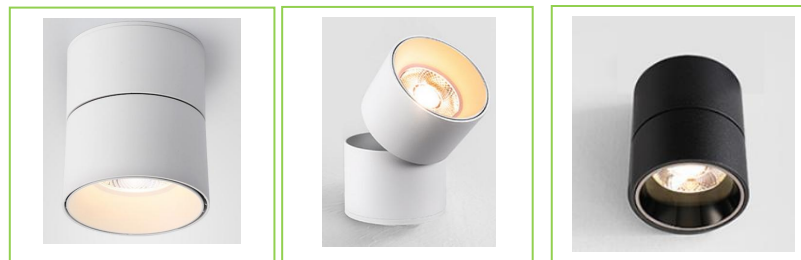


Information:

Features:

- Lighting Source: OSRAM Bridgelux
- Flexible beam direction adjustable: 350° horizontally and 90° vertically.
- Available in 90+.
- Dimming methods: ON/ OFF Triac Dimmable
- No need Cutout , surface mount install
- Strongly light up an object from far or high distance.
- Unique and compact design with perfect thermal management.
- High quality LED, No UV or IR radiation

Specification:



- Power factor: >0.90.
- Color Temp.(Color) : 2700K 3000K 3500K 4000K 5000K
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS
- Driver Certificates : TUV CB UL ETL CE ROHS SAA

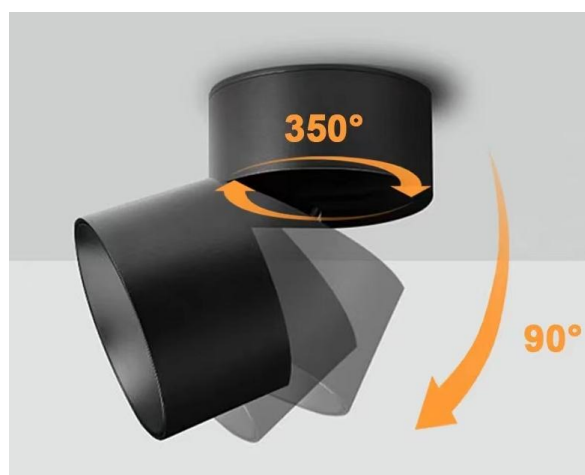

Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)
OP-DLO7W O3B	AC220-240V	7W	OSRAM Bridgelux	700LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D70 H100mm
OP-DLO10W O3B	AC220-240V	10W	OSRAM Bridgelux	1000LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D70 H100mm
OP-DLO15W O3B	AC220-240V	15W	OSRAM Bridgelux	1500LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D90 H110mm
OP-DLO20W O3B	AC220-240V	20W	OSRAM Bridgelux	2000LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D110 H115mm
OP-DLO25W O3B	AC220-240V	25W	OSRAM Bridgelux	2500LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D110 H115mm
OP-DLO30W O3B	AC220-240V	30W	OSRAM Bridgelux	3000LM	10° 20° 30°	2700K 3000K 4000K 5000K	90+	D110 H150mm



Photo-metric :

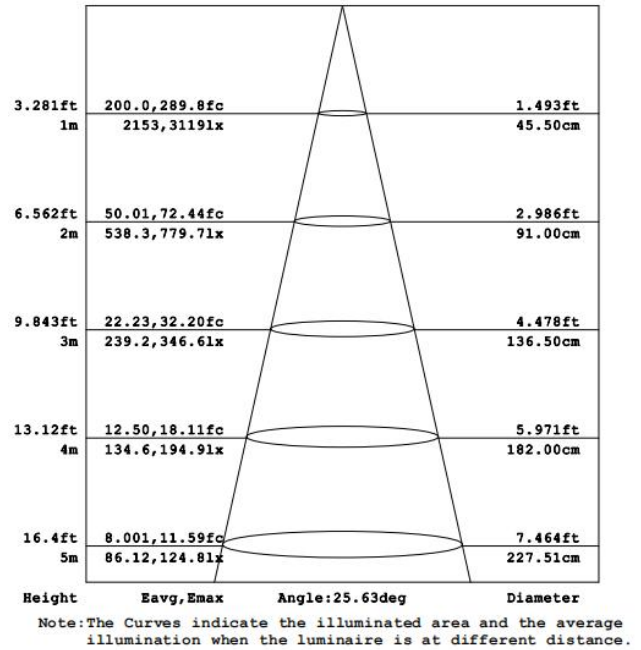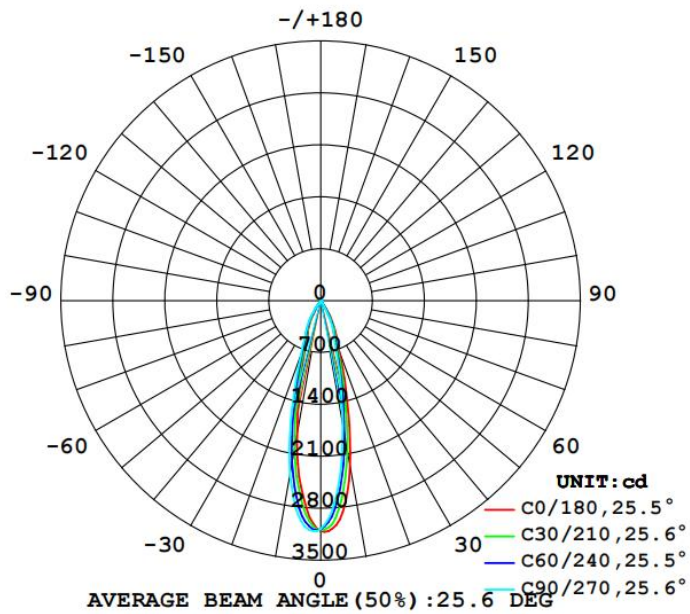

* Please contact our sales for IES file

Pictures :

