



P3 SMD LED Downlight

Description:

P3 downlights made by Opte Lighting have been specifically designed to produce a cost effective and well performing downlight solution to the market. LED recessed downlight with an anti-glare PMMA Cover, complete with a high quality LED driver ,it produce a wide spread of uniform light , unique sunken design to protect your eye from glare ,a comfortable and Very homogenous light .

It is Ideal for for your planned retrofit or new constructing,Creating tremendous energy saving at a extremely affordable price



Application:

- General Lighting areas
- Hotel Office Lighting
- Residential Lighting
- Retail Shop



LED	5 YEARS WARRANTY	CE	SAA APPROVALS	MacAdam >3	IP 20	Hg 0.0mg
L 80 B 10	50000h	⚡	ON OFF >100000	80% ≤1S	220-240V 50/60Hz	




Information:

Features:

- Opal diffuser glare free design ,Spread a very homogenous light
- 4 kinds of colour reflector options to perfectly suit the aesthetics of your project
- Direct replacement for compact fluorescent lamp downlights
- Energy savings of up to 60 % compared to luminaires that use CFL
- Adopt aluminum alloy as material die-casting process , high-end and gorgeous
- Low UGR < 16
- High transmission PMMA Cover
- No UV or IR radiation
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 ° C
- Working environment temperature: -20oc ~ +45oc.
- Dimming options : Triac 0/ 1-10V DALI
- Lamp Certificates: CE ROHS SAA



Model Number	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout(mm)
OP-DLP9W P3	AC220V-240V	9W	OSRAM	900LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ85*H46m m	ø75mm
OP-DLP12W P3	AC220V-240V	12W	OSRAM	1200LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ100*H48m m	ø90mm
OP-DLP15W P3	AC220V-240V	15W	OSRAM	1500LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ114*H68m m	ø95mm
OP-DLP20W P3	AC220V-240V	20W	OSRAM	2000LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ130*H55m m	ø110 mm
OP-DLP30W P3	AC220V-240V	30W	OSRAM	3000LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ170*H65m m	ø150mm
OP-DLP35W P3	AC220V-240V	35W	OSRAM	3500LM	90	2700K 3000K 4000K 5000K 6000K	80+	Φ170*H65m m	ø150mm

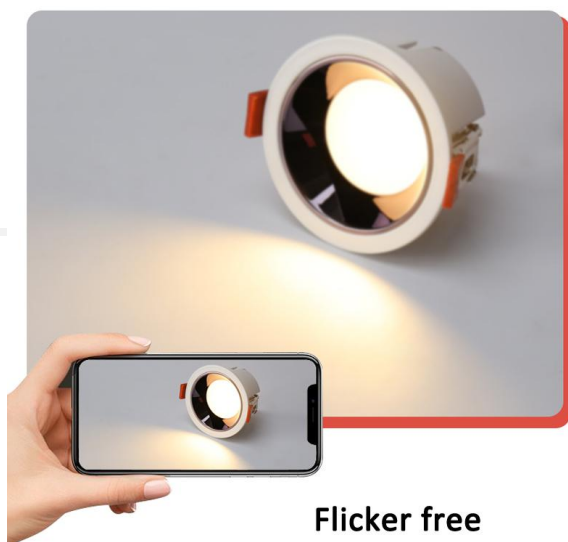

Flicker free

