

## TLA Series LED Track Light

### Description:

TLA series track light is a versatile track-mounted projector for interiors and it is available in two sizes ,the control gear is separate from the optical compartment to enhance the style and improve heat dissipation ,thus maximising the efficiency and lifetime of the light source .

Spot or flood lighting can be achieved by choosing a customized reflector inset from 15°, 24°, 38°, 60°.

A compact design with superior thermal management makes this fixture perfect for any truly High-End commercial application.

It is Ideal for for your planned retrofit or new constructing,Creating tremendous energy saving at a extremely affordable price



### Application:

- Shopping mall,jewelry shop and fashion store lighting.
- Gallery,furniture,hardware,museum and showroom lighting .
- Gym, hotel, hospital and stage lighting.
- Food Lighting ( Meat Fruit Vegetable Bread etc.)



## Information:

### Features:

- SDCM=3
- Class 2
- UGR less than 19
- Flicker Free
- No UV or IR radiation
- Flexible beam direction adjustable: 355° horizontally and 90° vertically.
- Strongly light up an object from far or high distance.
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 °C



### Specification:

- Power supply :Italy Brand Archi
- Track adapter: 2 wires 3 wires 4 wires 6 Wires
- Housing material: aluminum.
- Housing color: White, Black
- Dimmable : No/OFF / Triac Dim/ 0-10V Dim/ DALI Dim
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS SAA
- Driver Certificates : TUV CB UL CE ROHS SAA

Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Weight (kg)
OP-TLA25W	AC220-240V AC110-277V	25W	OSRSAM Bridgelux	2500LM	15, 24, 38,60	2700K 3000K 4000K 5000K	90+	D100 H155mm	1.3
OP-TLA30W	AC220-240V AC110-277V	30W	OSRSAM Bridgelux	3000LM	15, 24, 38,60	2700K 3000K 4000K 5000K	90+	D100 H155mm	1.3
OP-TLA35W	AC220-240V	35W	OSRSAM Bridgelux	3500LM	15, 24, 38,60	2700K 3000K 4000K 5000K	90+	D100 H155mm	1.3
OP-TLA40W	AC220-240V AC100-277V	40W	OSRSAM Bridgelux	4000LM	15, 24, 38,60	2700K 3000K 4000K 5000K	90+	D100 H180mm	1.5
OP-TLA45W	AC220-240V AC100-277V	45W	OSRSAM Bridgelux	4500LM	15, 24, 38,60	2700K 3000K 4000K 5000K	90+	D100 H180mm	1.5


## Photo-metric :

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

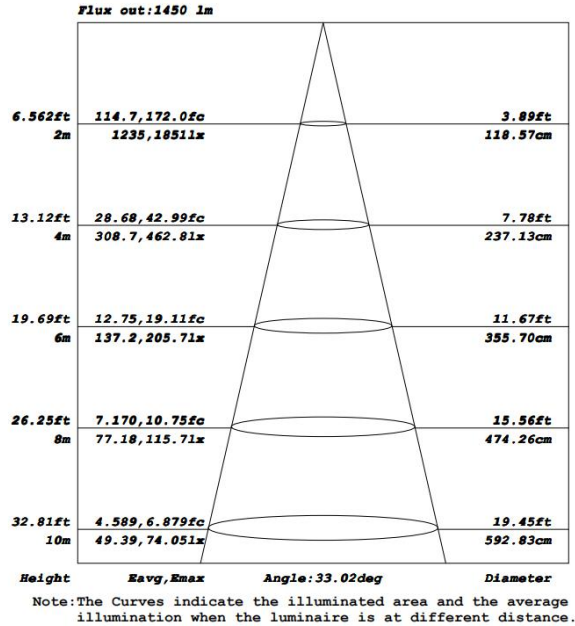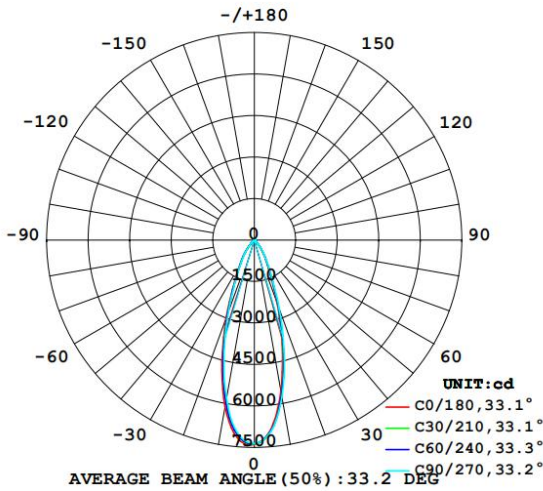


\* Please contact our sales for IES file

## Dimension :

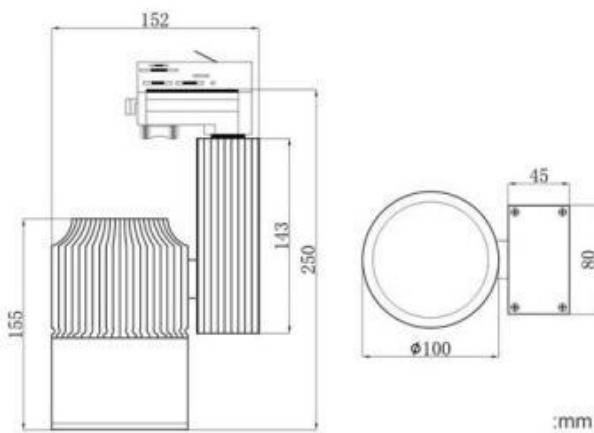

25W 30w 35W

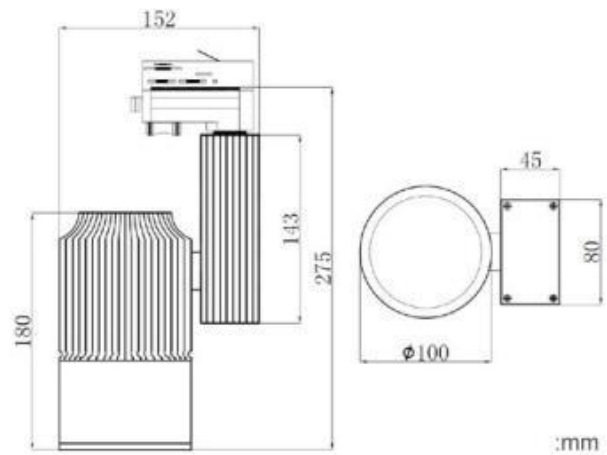

40W 45W