


CREATIVE INFINITE CRAFTSMAN QUALITY

ZERO DISTANCE
COOPERATION IN TEAMS



SHENZHEN OPTE LIGHTING CO.,LTD.

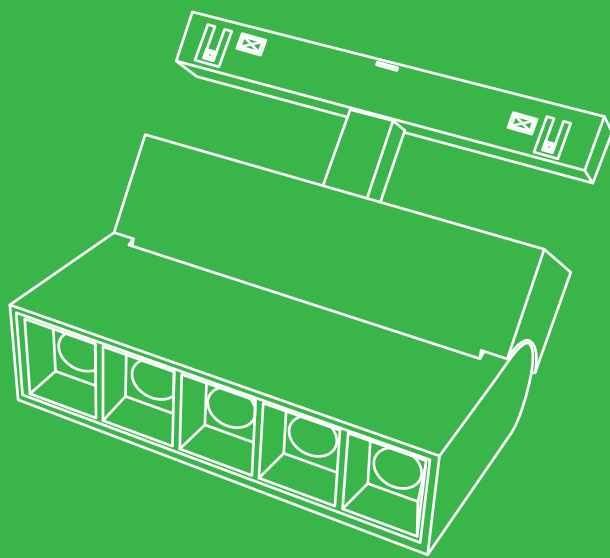

MAGNETIC GRILLE LIGHT

6W/12W/18W/24W/30W/45W



OSRAM
LAMP BEADS



36°
BEAM ANGLE



Grille Light 6LEDs




WHITE




BLACK

Dimensions

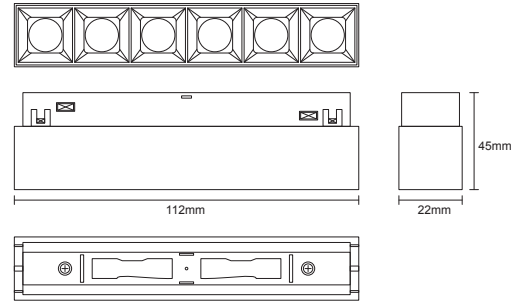

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-6T	48V	6W	OSRAM	Ra>90	36°	3000K,4000K,More..

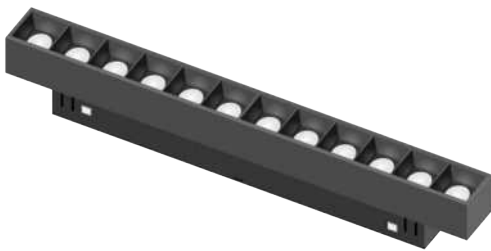

Grille Light 12LEDs




WHITE



BLACK

Dimensions

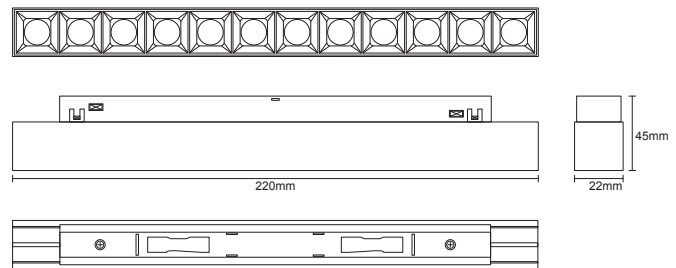

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-12T	48V	12W	OSRAM	Ra>90	36°	3000K,4000K,More..



Grille Light 18LEDS




WHITE



BLACK

Dimensions

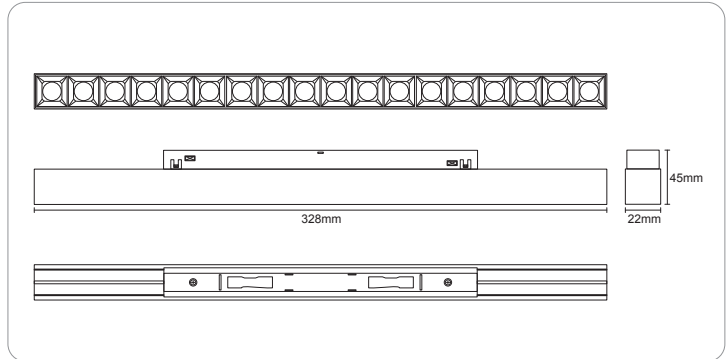

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-18T	48V	18W	OSRAM	Ra>90	36°	3000K,4000K,More..



Grille Light 24LEDS




WHITE



BLACK

Dimensions

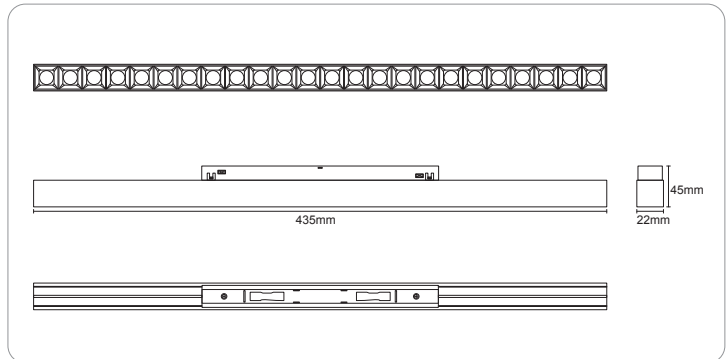

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-24T	48V	24W	OSRAM	Ra>90	36°	3000K,4000K,More..



Grille Light 30LEDS




WHITE



BLACK

Dimensions

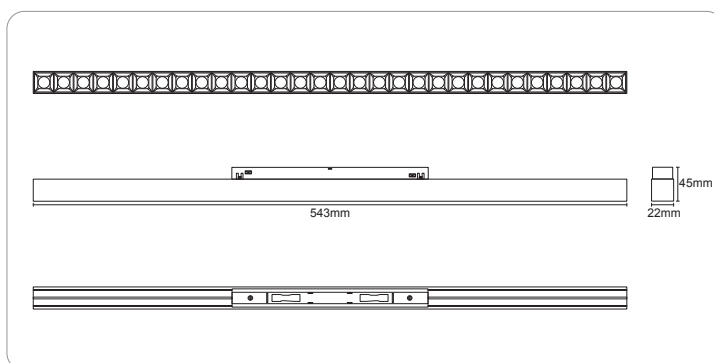

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-30T	48V	30W	OSRAM	Ra>90	36°	3000K,4000K,More..



Grille Light 60LEDS




WHITE



BLACK

Dimensions

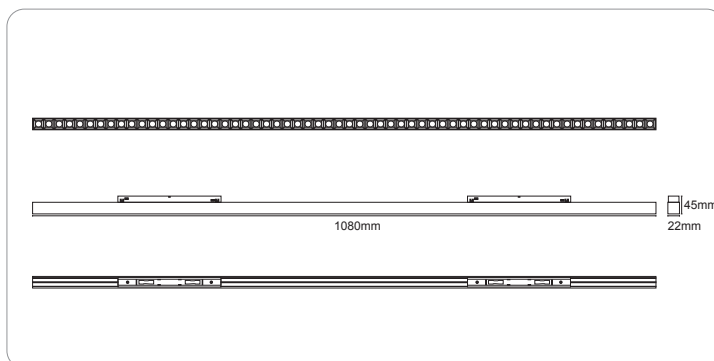

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-60T	48V	45W	OSRAM	Ra>90	36°	3000K,4000K,More..



MAGNETIC WALL WASH LIGHT


6W/12W/18W/24W/30W/45W



OSRAM
LAMP BEADS



POLARIZED LIGHT
BEAM ANGLE

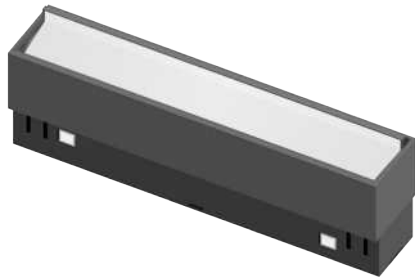

Polarized light




WHITE




BLACK

Dimensions

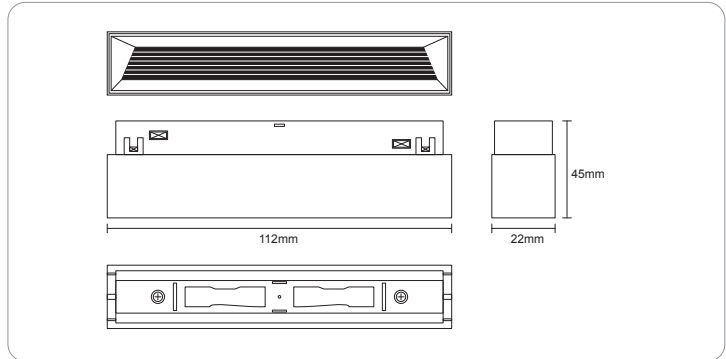

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-6TP	48V	6W	OSRAM	Ra>90	POLARIZED	3000K,4000K,More..

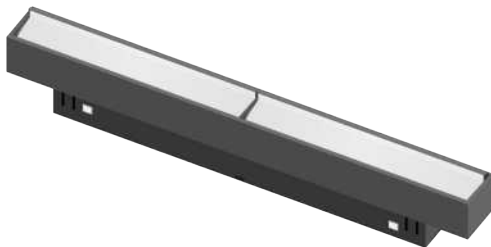

Polarized light




WHITE



BLACK

Dimensions

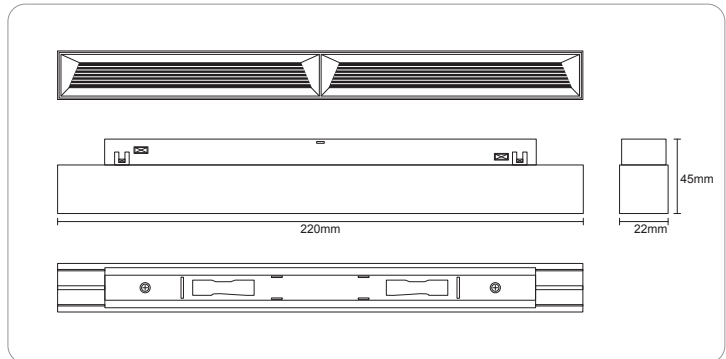

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-12TP	48V	12W	OSRAM	Ra>90	POLARIZED	3000K,4000K,More..

MAGNETIC FLOOD LIGHT

10W/20W/30W



OSRAM
LAMP BEADS



120°
BEAM ANGLE



Flood Light 300




WHITE



BLACK

Dimensions

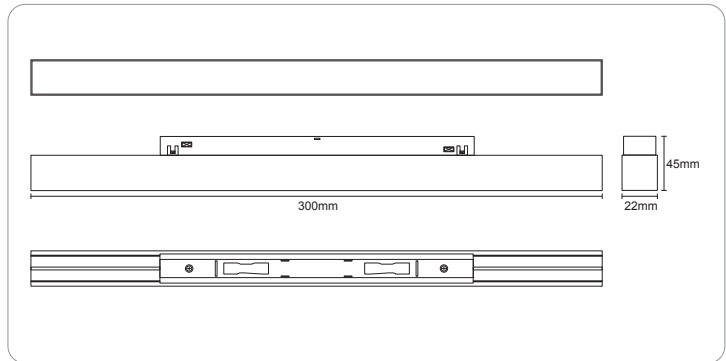

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-300F	48V	10W	OSRAM	Ra>90	120°	3000K,4000K,More..



Flood Light 600




WHITE



BLACK

Dimensions

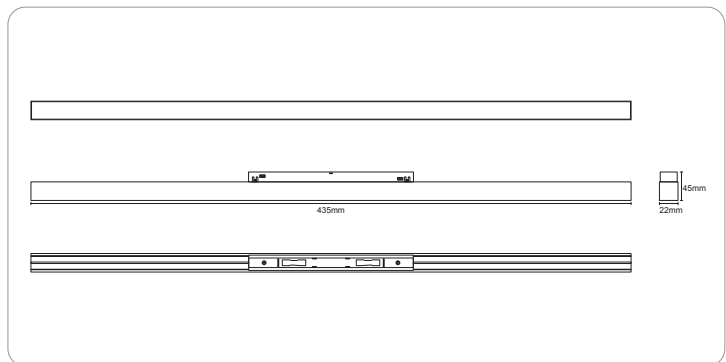

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-600F	48V	20W	OSRAM	Ra>90	120°	3000K,4000K,More..



Flood Light 900




WHITE



BLACK

Dimensions

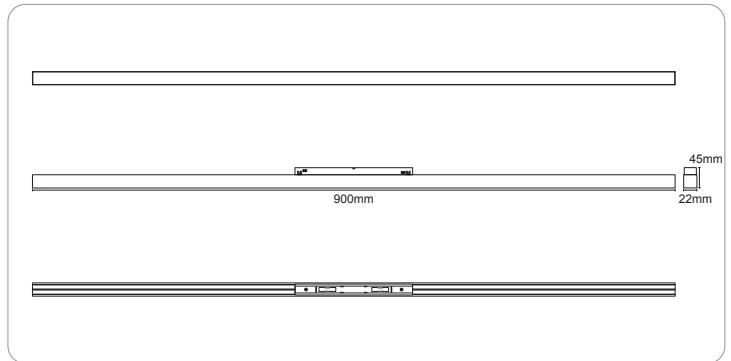

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-900F	48V	30W	OSRAM	Ra>90	120°	3000K,4000K,More..



Flood Light 1200




WHITE




BLACK

Dimensions

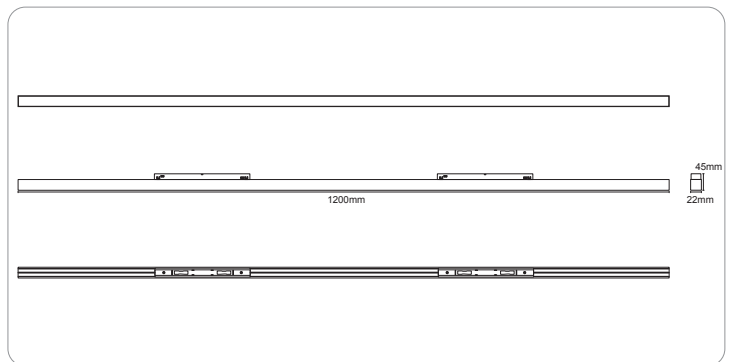

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS22-1200F	48V	40W	OSRAM	Ra>90	120°	3000K,4000K,More..

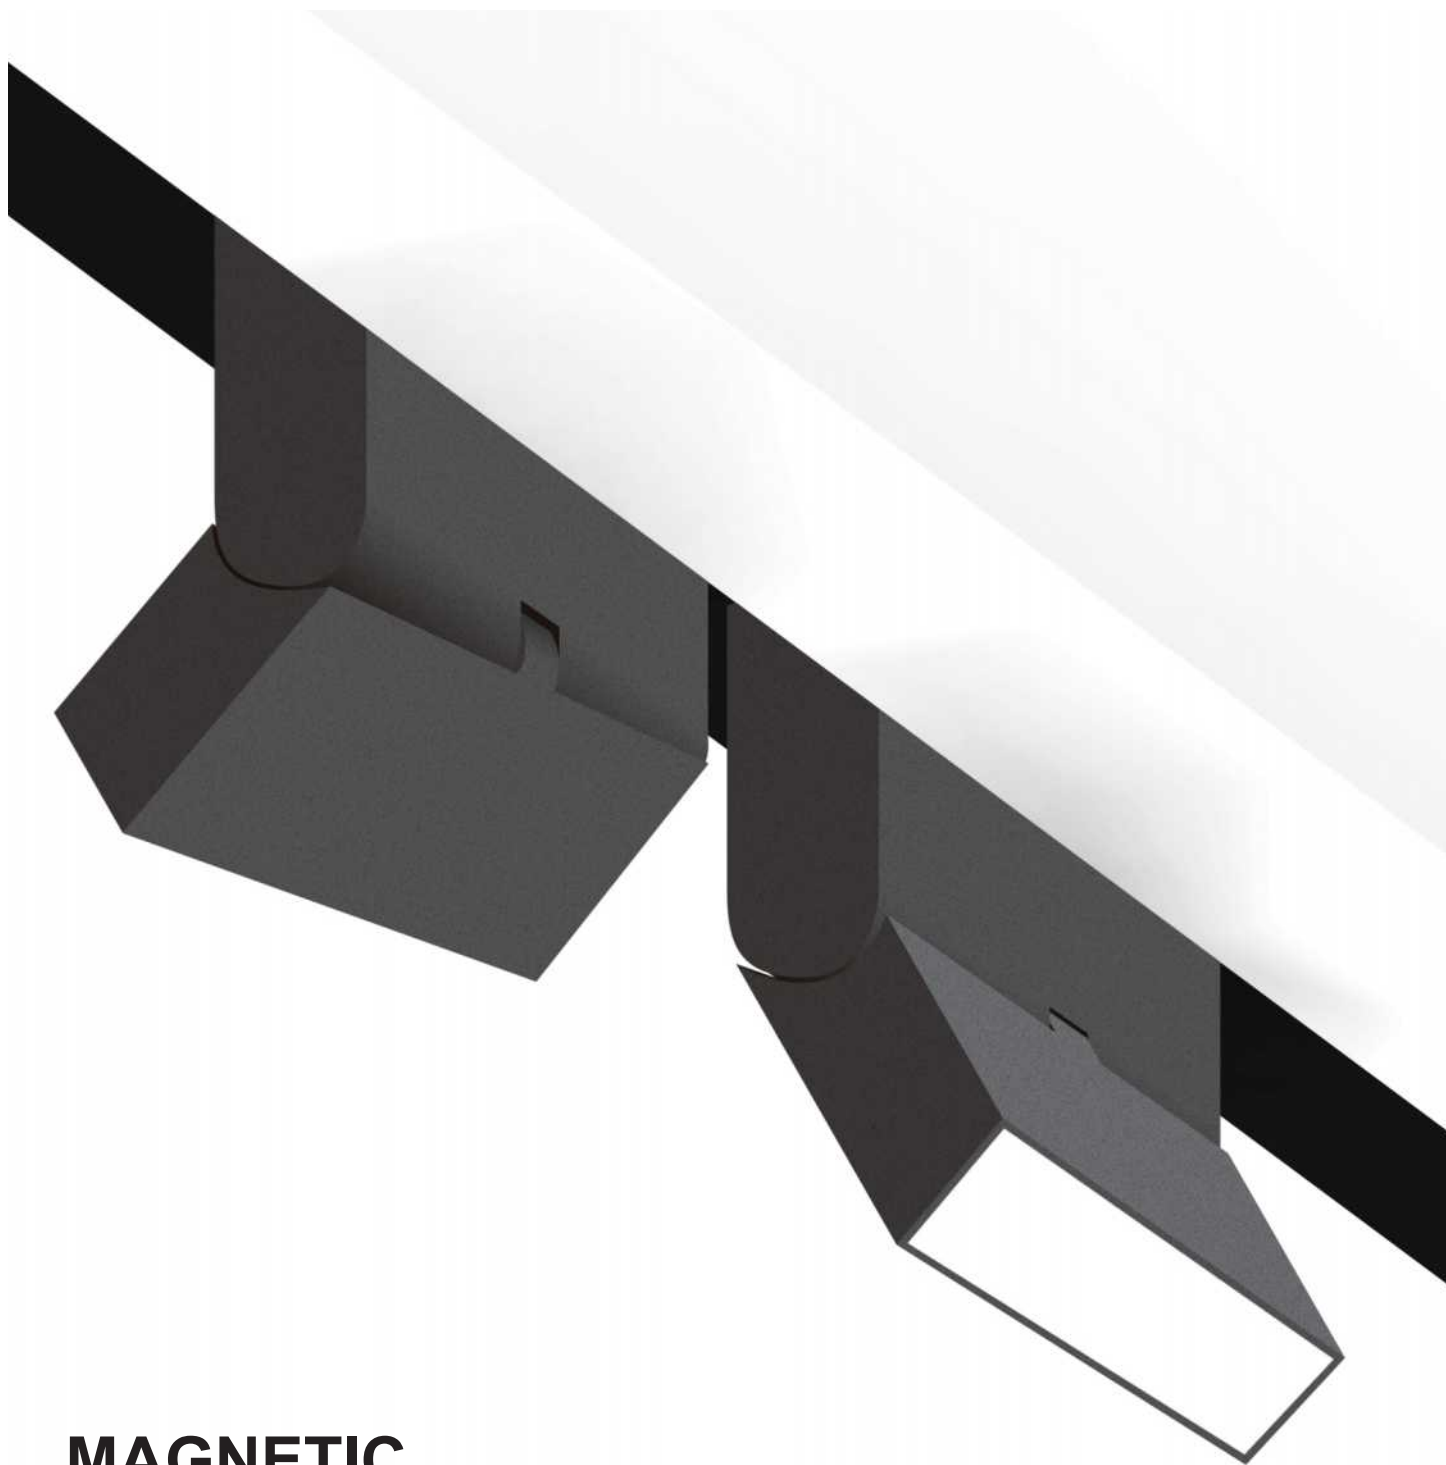

MAGNETIC FOLDING LIGHT

6W/12W/24W




OSRAM
LAMP BEADS



36°
BEAM ANGLE

Dimensions

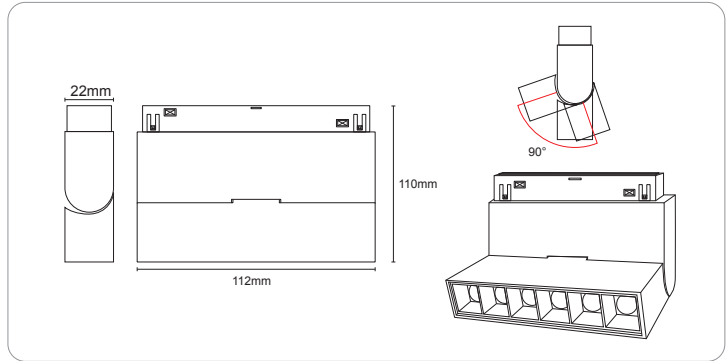

Folding Grille 6LEDS



WHITE



BLACK

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-6T	48V	6W	OSRAM	Ra>90	36°	3000K,4000K,More..



Folding Grille 12LEDS




WHITE




BLACK

Dimensions

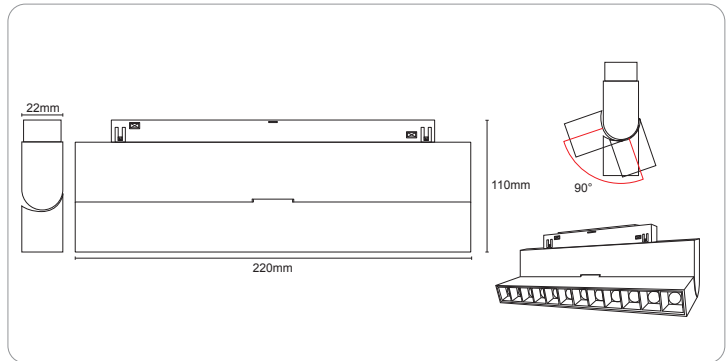

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-12T	48V	12W	OSRAM	Ra>90	36°	3000K,4000K,More..

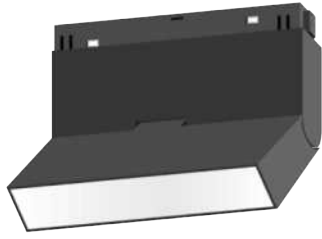

Folding Flood 6LEDs




WHITE



BLACK

Dimensions

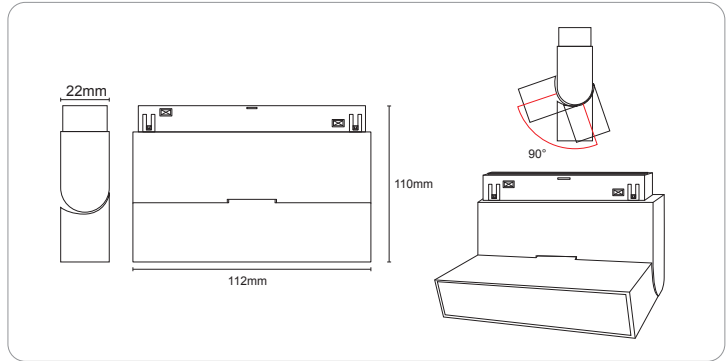

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-6F	48V	6W	OSRAM	Ra>90	120°	3000K,4000K,More..



Folding Flood 12LEDs




WHITE



BLACK

Dimensions

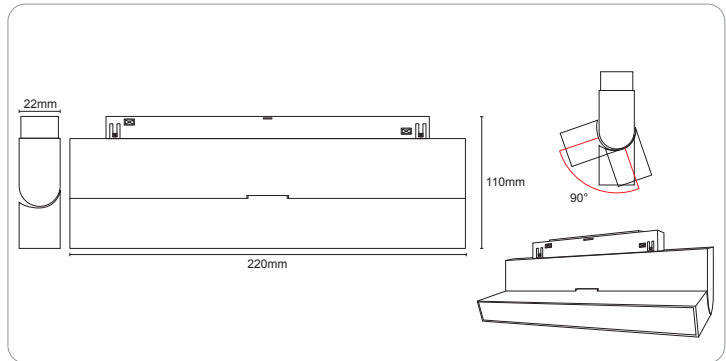

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-12F	48V	12W	OSRAM	Ra>90	120°	3000K,4000K,More..



Folding Grille 5LEDS




WHITE



BLACK

Dimensions

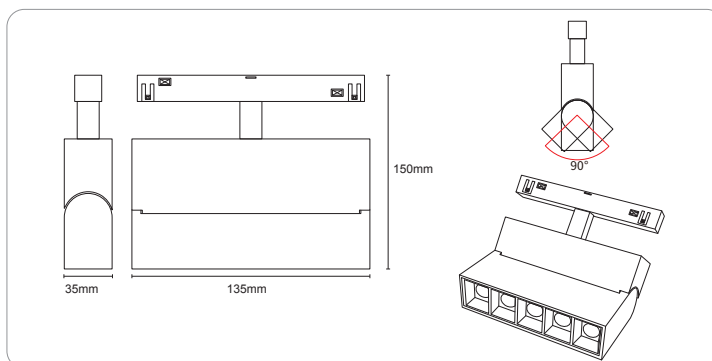

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-5T	48V	12W	OSRAM	Ra>90	36°	3000K,4000K,More..



Folding Grille 10LEDS




WHITE



BLACK

Dimensions

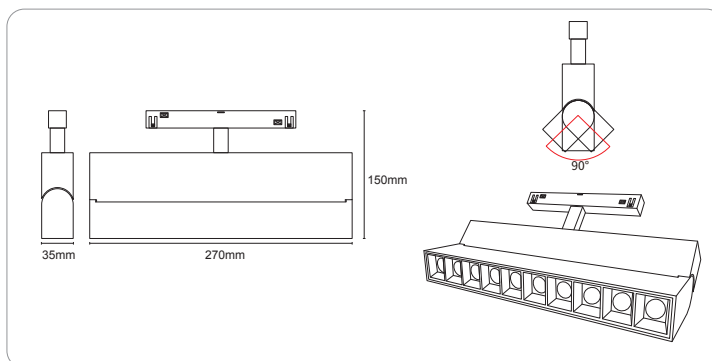

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX003-10T	48V	24W	OSRAM	Ra>90	36°	3000K,4000K,More..



MAGNETIC SPOT LIGHT

7W/12W/24W



CREE
LAMP BEADS



24°
BEAM ANGLE



Spotlight-7W




WHITE



BLACK

Dimensions

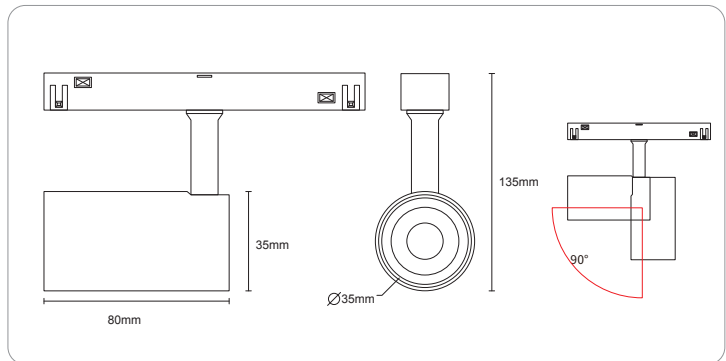

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX035	48V	7W	Bridgelux	Ra>90	24°	3000K,4000K,More..



Spotlight-12W




WHITE



BLACK

Dimensions

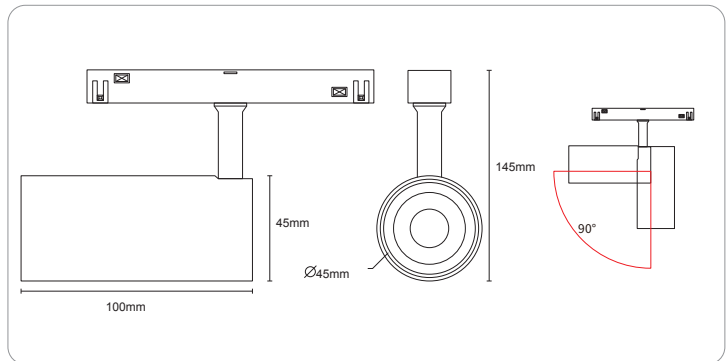

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX045	48V	12W	Bridgelux	Ra>90	24°	3000K,4000K,More..



Spotlight-18W




WHITE



BLACK

Dimensions

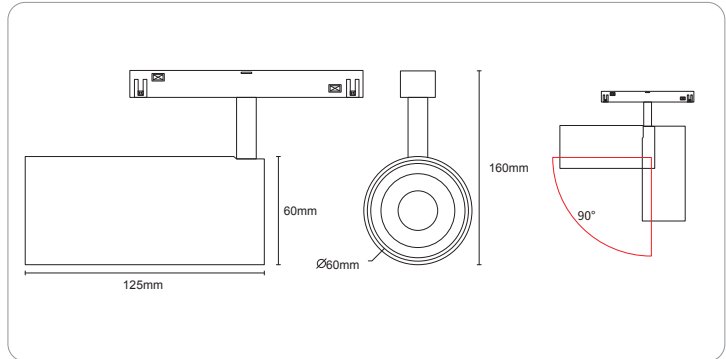

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX060	48V	18W	Bridgelux	Ra>90	24°	3000K,4000K,More..



Spotlight-24W




WHITE



BLACK

Dimensions

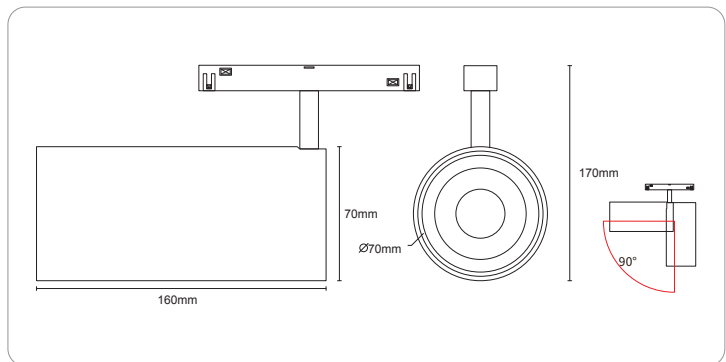

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CX070	48V	24W	Bridgelux	Ra>90	24°	3000K,4000K,More..



Flood-9W




WHITE



BLACK

Dimensions

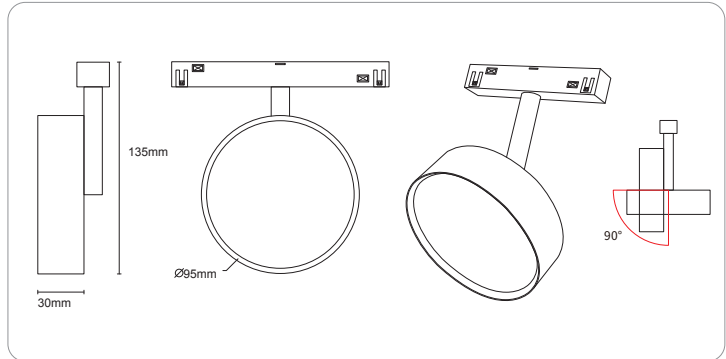

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CXB90	48V	9W	Bridgelux	Ra>90	120°	3000K,4000K,More..



Grille 9W




WHITE



BLACK

Dimensions

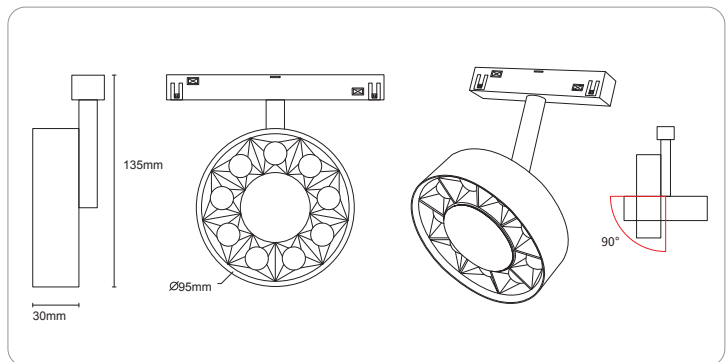

PRODUCT PARAMETERS

Model NO.	Input -	System Power	LED Power	CRI -	Beam Angle	CCT -
OP-HS-CXG90	48V	9W	Bridgelux	Ra>90	24°	3000K,4000K,More..



MAGNETIC SUSPENSION LIGHT

12W



CREE
LAMP BEADS




24°
BEAM ANGLE



Hanging

☐ WHITE ☒ BLACK

Dimensions

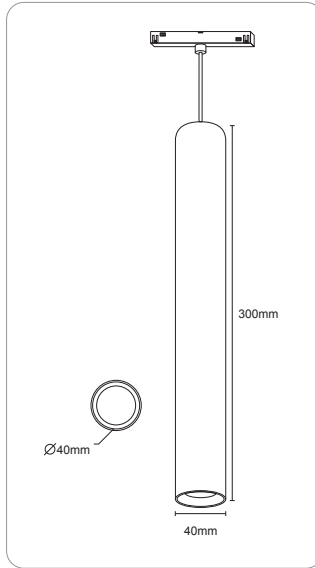

PRODUCT PARAMETERS

Model NO. **OP-H5O-CXD300**

Input 48V

System Power 12W

LED Power CREE

CRI Ra>90

Beam Angle 24°

CCT 3000K,4000K,More..


Luminous Flux 600-800 lms



Hanging

☐ WHITE ☒ BLACK

Dimensions

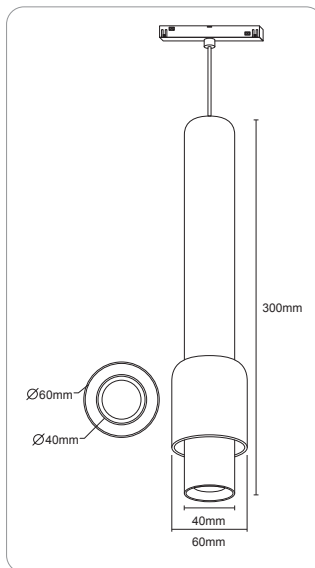

PRODUCT PARAMETERS

Model NO. **OP-H5-CXD300**

Input 48V

System Power 12W


LED Power CREE

CRI Ra>90

Beam Angle 24°

CCT 3000K,4000K,More..


Luminous Flux 600-800 lms

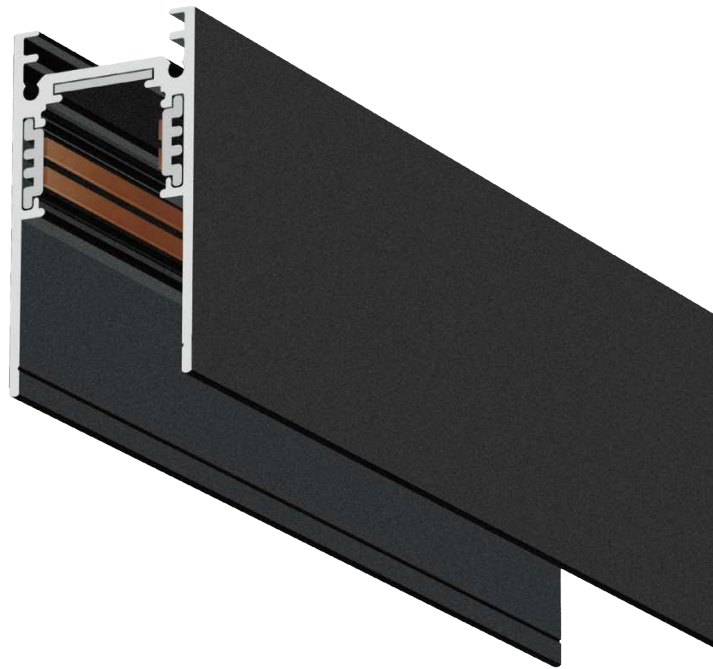

Track

BLACK

Install : Surface/Suspension

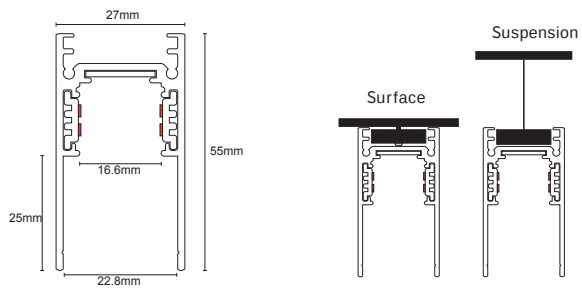

PRODUCT PARAMETERS

Model NO. **OP-HS-26C**

Track Length 100cm, 150cm, 200cm, 300cm

Package 9/Carton




Horizontal Corner Surface

Horizontal Corner 90° Ceiling Use



Vertical Corner Surface


Vertical Corner 90° Ceiling -Wall Use

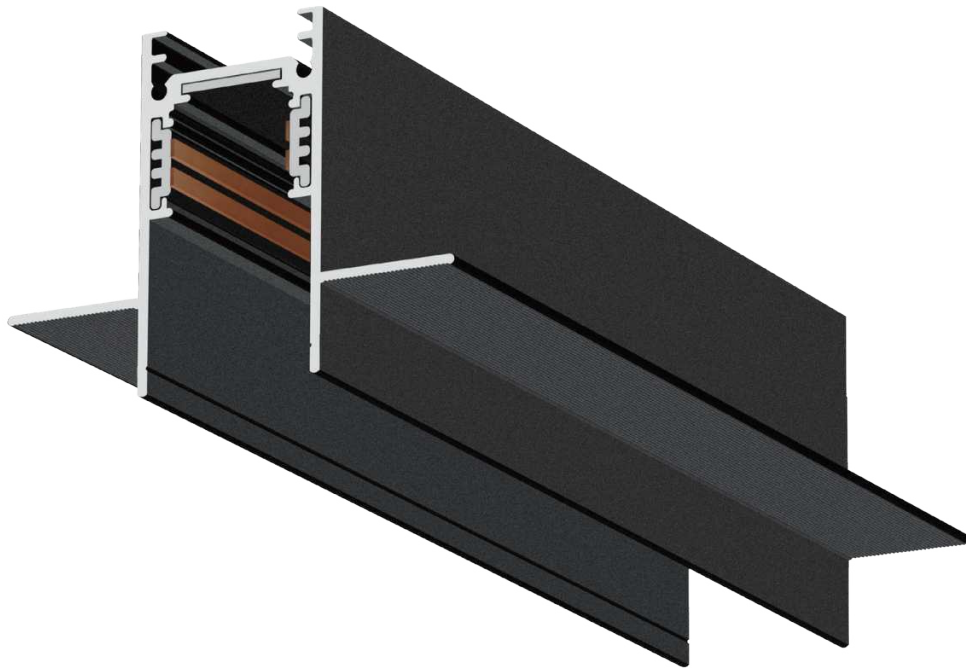

Track

BLACK

Install: Recessed

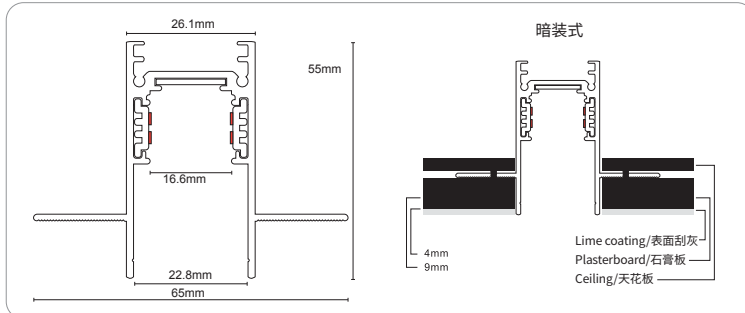

PRODUCT PARAMETERS

Model NO. **OP-HS-26D**

Track Length 100cm, 150cm, 200cm, 300cm

Package 5/Carton




Horizontal Corner Recessed

Horizontal Corner 90° Ceiling Use



Vertical Corner Recessed


Vertical Corner 90° Ceiling -Wall Use

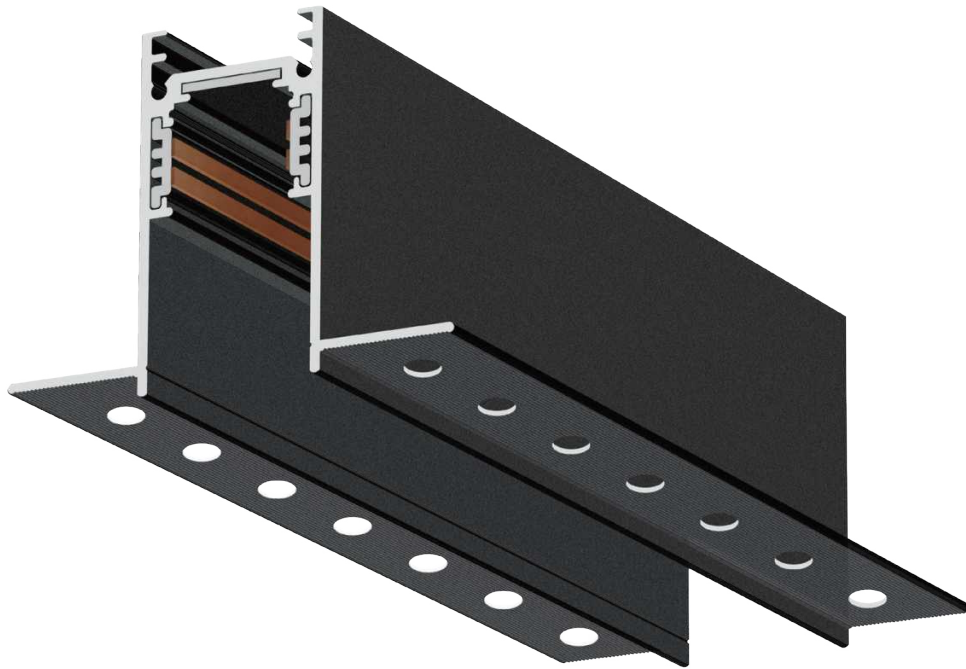

Track

BLACK

Install: Recessed Trimless Plaster

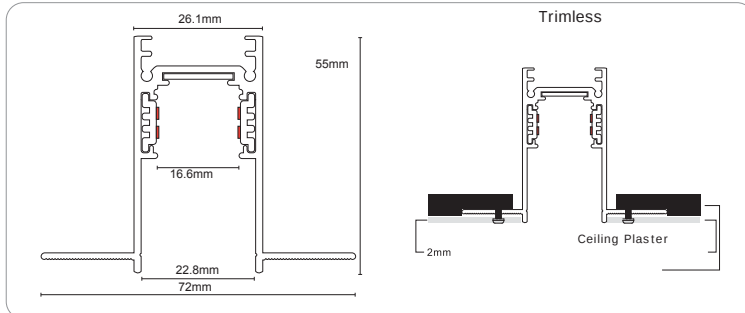

PRODUCT PARAMETERS

Model NO. **OP-HS-26E**

Track Length 100cm, 150cm, 200cm, 300cm

Package 5/Carton



Horizontal Corner Recessed

Horizontal Corner 90° Ceiling Use



Vertical Corner Recessed

Vertical Corner 90° Ceiling -Wall Use



Joint Connector

Connect 2 tracks



Power Head

The external transformer is connected to one end of the module line, and the plastic end of the module is connected to the track, so that the track forms a low-voltage 48V



Joint Connector Flex (Short)

Connect 2 tracks



Joint Connector Flex (Long)

Connect 2 tracks



Track Clip

Splicing reinforcement between two rails, used on the back of the two rails usually used for Surface mounted track



Hanging Cable

Suspension cable for track, 2 cables for one track

Transformer 100W

Transformer 200W

Embedded Rail

Input Voltage 85-220V

Output Voltage 48V

Notice

Total Wattage of all lamps in one rail should lower the transformer wattage



Remote Controller

Used with smart lamps , dimming, CCT Changing.



Wall Controller

Used with smart lamps , dimming, CCT Changing.

MAGNETIC TRACK LIGHT

