

Waterproof LED Downlight

Description:


DLW Recessed IP65 Waterproof LED Downlight is required for zone regions near water sources. completed lamps IP65 waterproof protection with waterproof driver and waterproof connectors, It makes the room look better and they will have a higher resistance to steams.This downlights finish paint by Anti-Corrsive materials and fully water-resistant which means they are the perfect option for outdoor LED downlights .

It is Ideal for for your planned retrofit or new constructing,Creating tremendous energy saving at a extremely affordable price



Application:

- Villa ,Lobbies, Corridors
- Bathroom Lighting Restaurant
- Seashore Lighting

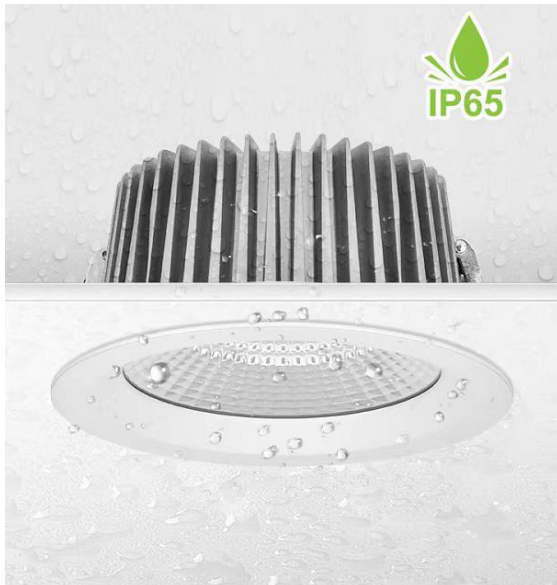

| | | | | | | |
|--------------|------------------|------------------|----------------|-------------------------|---------------------|----------|
| LED | 5 YEARS WARRANTY | CE | SAA APPROVALS | MacAdam <3 | IP 65 | Hg 0.0mg |
| L 80 B 10 | 50000h | Grounding symbol | ON OFF >100000 | 80% $\le 1S$ | 220-240V 50/60Hz | |



Information:

Features:

- IP65 design suitable for indoor and outdoor use
- Die-casting ADC12 Aluminum, powder painting, acid and alkali resistance, oxidation resistance.
- Extremely long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 °C

Specification:

- Power supply : Lifud (IP54) or Aluminum Shell Driver (IP65)
- Lighting Source: OSRAM BRIDGELUX
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS



| Model No. | Input voltage(V) | Power (w) | LED Chip | Luminous flux (lm) (±5%) | Beam angle(o) | CCT (K) | CRI | Size (mm) | Cutout |
|--------------|--------------------------|-----------|--------------------|--------------------------|---------------|----------------------------|-----|----------------|--------|
| OP-DLW15W W5 | AC220-240V AC100-277V | 15W | OSRAM Bridgelux | 1500lm | 60° | 2700K 3000K 4000K 5000K | 90+ | Φ110*H59 mm | ø90mm |
| OP-DLW20W W5 | AC220-240V AC100-277V | 20W | OSRAM Bridgelux | 2000lm | 60° | 2700K 3000K 4000K 5000K | 90+ | Φ127*H70 mm | ø110mm |
| OP-DLW30W W5 | AC220-240V AC100-277V | 30W | OSRAM Bridgelux | 3000lm | 60° | 2700K 3000K 4000K 5000K | 90+ | Φ165*H80 mm | ø145mm |
| OP-DLW50W W5 | AC220-240V AC100-277V | 50W | OSRAM Bridgelux | 5000lm | 60° | 2700K 3000K 4000K 5000K | 90+ | Φ220*H90 mm | ø200mm |




Pictures :

ANTI-GLARE STRUCTURE

Deep anti glare design to improve the comfort of lighting

UGR<19

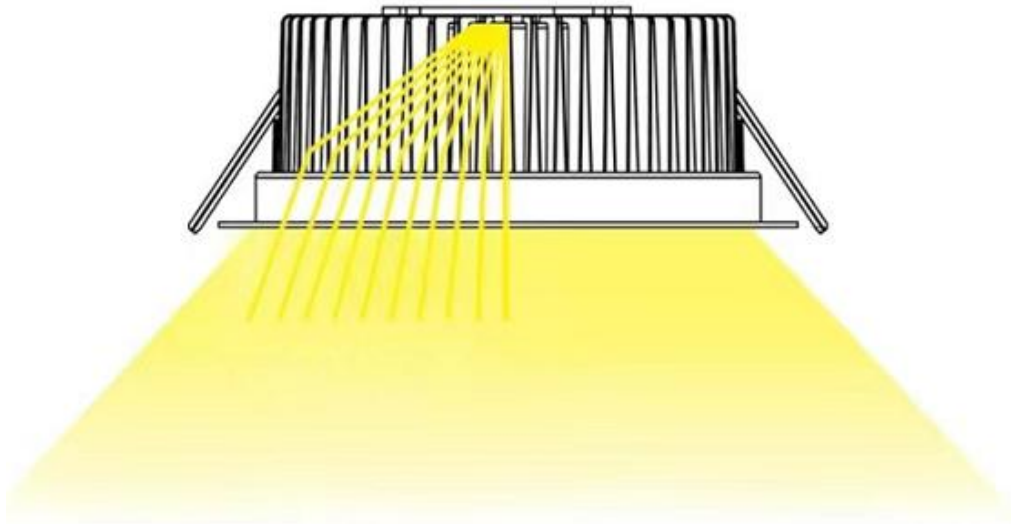

IP65 WATERPROOF

The IP65 is designed for use in humid spaces. Suitable for indoor and outdoor use.

